

## General Description

The LTA809x family (LTA8091, LTA8092, and LTA8094) is a new generation of high voltage (48 V), low noise, precision operational amplifiers. These devices offer outstanding dc precision and ac performance, including low offset, low offset drift, 22-MHz bandwidth, and 4 nV/ $\sqrt{\text{Hz}}$  input voltage noise density at 10 kHz. Unique features such as differential input-voltage range to the negative supply rail, high output current ( $\pm 45$  mA), high capacitive load drive of up to 1 nF, and high slew rate (20 V/ $\mu\text{s}$ ) make the LTA809x high-performance operational amplifiers for high-voltage industrial and medical applications.

The robust design of the LTA809x family provides ease-of-use to the circuit designer: integrated RF/EMI rejection filter, no phase reversal in overdrive conditions, and high electro-static discharge (ESD) protection. The LTA809x are optimized for operation at voltages from +4.5 V ( $\pm 2.25$  V) to +48 V ( $\pm 24$  V) over the extended temperature range of  $-40$  °C to +125 °C.

The LTA8091 (single) is available in both SOT23-5L and SOIC-8L packages. The LTA8092 (dual) is offered in SOIC-8L and MSOP-8L packages. The quad-channel LTA8094 is offered in both SOIC-14L and TSSOP-14L packages.


## Features and Benefits

- Wide Supply:  $\pm 2.25$  V to  $\pm 24$  V, 4.5 V to 48 V
- Wide Bandwidth: 22 MHz GBW
- High Slew Rate: 20 V/ $\mu\text{s}$
- Low Noise: 4 nV/ $\sqrt{\text{Hz}}$  at 10 kHz
- Low Offset Voltage:  $\pm 350$   $\mu\text{V}$  Maximum
- Low Offset Voltage Drift:  $\pm 1.5$   $\mu\text{V}/^\circ\text{C}$
- High Common-Mode Rejection: 116 dB
- Low Bias Current:  $\pm 10$  pA
- EMI/RFI Filtered Inputs

## Applications

- High-Side and Low-Side Current Sensing
- Audio Preamplifier
- High Precision Comparator
- Multiplexed Data-Acquisition Systems
- High-Resolution ADC Driver Amplifiers
- SAR ADC Reference Buffers
- Test and Measurement Equipment
- Programmable Logic Controllers

## Pin Configuration (Top View)

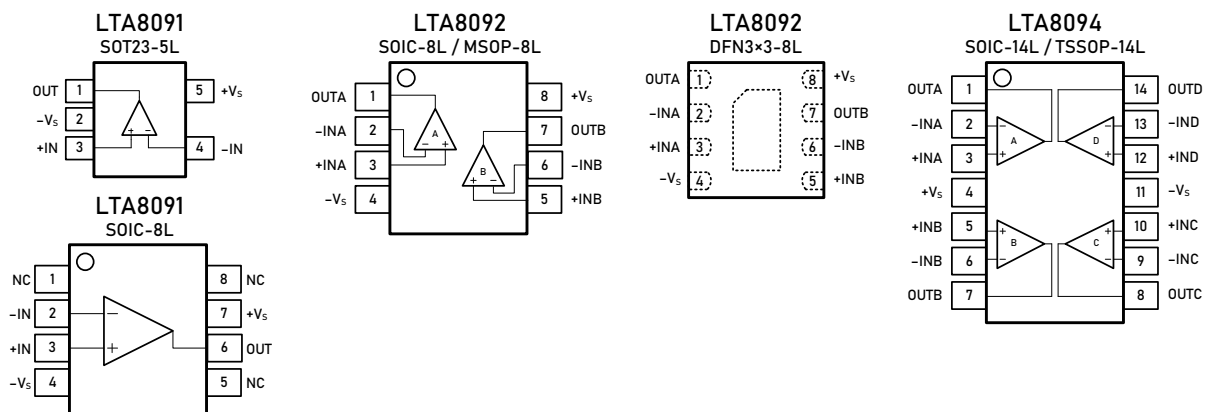

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

## Pin Description

| Symbol          | Description  |
|-----------------|--|
| -IN             | Inverting input of the amplifier. The voltage range is from $V_{S-}$ to $V_{S+} - 1.5$ V.  |
| +IN             | Non-inverting input of the amplifier. This pin has the same voltage range as -IN.  |
| +V <sub>S</sub> | Positive power supply. The voltage is from 4.5 V to 48 V. Split supplies are possible as long as the voltage between $V_{S+}$ and $V_{S-}$ is from 4.5 V to 48 V.                    |
| -V <sub>S</sub> | Negative power supply. It is normally tied to ground. It can also be tied to a voltage other than ground as long as the voltage between $V_{S+}$ and $V_{S-}$ is from 4.5 V to 48 V. |
| OUT             | Amplifier output.  |
| NC              | No connection  |

## Ordering Information <sup>(1)</sup>

| Type Number    | Package Name | Package Quantity     | Eco Class <sup>(2)</sup> | Marking Code <sup>(3)</sup> |
|----------------|--------------|----------------------|--------------------------|-----------------------------|
| LTA8091XT5/R6  | SOT23-5L     | Tape and Reel, 3 000 | Green (RoHS & no Sb/Br)  | H91                         |
| LTA8091XS8/R8  | SOIC-8L      | Tape and Reel, 4 000 | Green (RoHS & no Sb/Br)  | HV-91                       |
| LTA8092XS8/R8  | SOIC-8L      | Tape and Reel, 4 000 | Green (RoHS & no Sb/Br)  | HV-92                       |
| LTA8092XV8/R6  | MSOP-8L      | Tape and Reel, 3 000 | Green (RoHS & no Sb/Br)  | HV92                        |
| LTA8092XF8/R10 | DFN3x3-8L    | Tape and Reel, 3 000 | Green (RoHS & no Sb/Br)  | HV92                        |
| LTA8094XS14/R5 | SOIC-14L     | Tape and Reel, 2 500 | Green (RoHS & no Sb/Br)  | HV-94                       |
| LTA8094XT14/R6 | TSSOP-14L    | Tape and Reel, 3 000 | Green (RoHS & no Sb/Br)  | HV-94                       |

(1) Please contact to your Linearin representative for the latest availability information and product content details.

(2) Eco Class - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & Halogen Free).

(3) There may be multiple device markings, a varied marking character of "x", or additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

## Limiting Value - In accordance with the Absolute Maximum Rating System (IEC 60134).

| Parameter                                 | Absolute Maximum Rating                             |
|---|---|
| Supply Voltage, $V_{S+}$ to $V_{S-}$      | 60 V  |
| Signal Input Terminals: Voltage, Current  | $-V_{S-} - 0.3$ V to $+V_{S+} + 0.3$ V, $\pm 10$ mA |
| Output Short-Circuit                      | Continuous  |
| Storage Temperature Range, $T_{stg}$      | $-65$ °C to $+150$ °C                               |
| Junction Temperature, $T_j$               | 150 °C  |
| Lead Temperature Range (Soldering 10 sec) | 260 °C  |

## ESD Rating

| Parameter                       | Item  | Value | Unit |
|---------------------------------|---|-------|------|
| Electrostatic Discharge Voltage | Human body model (HBM), per MIL-STD-883J / Method 3015.9 <sup>(1)</sup> | 2 000 | V    |
|                                 | Charged device model (CDM), per ESDA/JEDEC JS-002-2014 <sup>(2)</sup>   | 2 000 |      |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible if necessary precautions are taken.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible if necessary precautions are taken.

**Electrical Characteristics**

$V_S = 4.5 \text{ V to } 48 \text{ V}$ ,  $T_A = +25 \text{ }^\circ\text{C}$ ,  $V_{CM} = V_{OUT} = V_S/2$ , and  $R_L = 10 \text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted.  
 Boldface limits apply over the specified temperature range,  $T_A = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$ .

| Parameter                         | Symbol              | Conditions  | Min.   | Typ.                     | Max.                   | Unit                         |
|-----------------------------------|---------------------|---|--------|--------------------------|------------------------|------------------------------|
| <b>OFFSET VOLTAGE</b>             |                     |   |        |                          |                        |                              |
| Input offset voltage              | $V_{OS}$            | $V_S = 5 \text{ V}$   |        | $\pm 25$                 | $\pm 100$<br>$\pm 350$ | $\mu\text{V}$                |
| Offset voltage drift              | $V_{OS \text{ TC}}$ | $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$   |        | $\pm 1.5$                |                        | $\mu\text{V}/^\circ\text{C}$ |
| Power supply rejection ratio      | PSRR                | $V_S = 4.5 \text{ to } 48 \text{ V}$ , $V_{CM} = 0.1 \text{ V}$<br>$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$  |        | 3.5                      |                        | $\mu\text{V}/\text{V}$       |
| <b>INPUT BIAS CURRENT</b>         |                     |   |        |                          |                        |                              |
| Input bias current                | $I_B$               | $T_A = -40 \text{ to } +85 \text{ }^\circ\text{C}$<br>$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$   |        | 10<br>150<br>600         |                        | $\text{pA}$                  |
| Input offset current              | $I_{OS}$            |   |        | 5                        |                        | $\text{pA}$                  |
| <b>NOISE</b>                      |                     |   |        |                          |                        |                              |
| Input voltage noise               | $V_n$               | $f = 0.1 \text{ to } 10 \text{ Hz}$   |        | 3.6                      |                        | $\mu\text{V}_{\text{P-P}}$   |
| Input voltage noise density       | $e_n$               | $f = 1 \text{ kHz}$<br>$f = 10 \text{ kHz}$   |        | 8<br>4                   |                        | $\text{nV}/\sqrt{\text{Hz}}$ |
| Input current noise density       | $i_n$               | $f = 1 \text{ kHz}$   |        | 5                        |                        | $\text{fA}/\sqrt{\text{Hz}}$ |
| <b>INPUT VOLTAGE</b>              |                     |   |        |                          |                        |                              |
| Common-mode voltage range         | $V_{CM}$            |   | $-V_S$ |                          | $+V_S - 1.5$           | $\text{V}$                   |
| Common-mode rejection ratio       | CMRR                | $V_S = 40 \text{ V}$ , $V_{CM} = 0 \text{ to } 38 \text{ V}$<br>$V_{CM} = 0.1 \text{ to } 38 \text{ V}$ , $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$<br>$V_S = 5 \text{ V}$ , $V_{CM} = 0 \text{ to } 3.5 \text{ V}$<br>$V_{CM} = 0.1 \text{ to } 3 \text{ V}$ , $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$ |        | 116<br>103<br>96<br>84   |                        | $\text{dB}$                  |
| <b>INPUT IMPEDANCE</b>            |                     |   |        |                          |                        |                              |
| Input capacitance                 | $C_{IN}$            | Differential<br>Common mode   |        | 2<br>3.5                 |                        | $\text{pF}$                  |
| <b>OPEN-LOOP GAIN</b>             |                     |   |        |                          |                        |                              |
| Open-loop voltage gain            | $A_{VOL}$           | $V_S = 40 \text{ V}$ , $V_0 = 0.1 \text{ to } 39.9 \text{ V}$<br>$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$<br>$V_S = 5 \text{ V}$ , $V_0 = 0.1 \text{ to } 4.9 \text{ V}$<br>$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$  |        | 130<br>120<br>122<br>112 |                        | $\text{dB}$                  |
| <b>FREQUENCY RESPONSE</b>         |                     |   |        |                          |                        |                              |
| Gain bandwidth product            | GBW                 |   |        | 22                       |                        | $\text{MHz}$                 |
| Slew rate                         | SR                  | $V_S = 40 \text{ V}$ , $G = +1$ , $10 \text{ V step}$   |        | 20                       |                        | $\text{V}/\mu\text{s}$       |
| Total harmonic distortion + noise | THD+N               | $G = +1$ , $f = 1 \text{ kHz}$ , $V_0 = 3 \text{ V}_{\text{RMS}}$   |        | 0.0001                   |                        | $\%$                         |
| Settling time                     | $t_S$               | To 0.1%, $V_S = 40 \text{ V}$ , $G = +1$ , $5 \text{ V step}$<br>To 0.01%, $V_S = 40 \text{ V}$ , $G = +1$ , $5 \text{ V step}$   |        | 0.9<br>2                 |                        | $\mu\text{s}$                |
| Overload recovery time            | $t_{OR}$            | $V_{IN} \times \text{Gain} > V_S$   |        | 0.3                      |                        | $\mu\text{s}$                |

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.


## Electrical Characteristics (continued)

$V_S = 4\text{ V to }48\text{ V}$ ,  $T_A = +25\text{ }^\circ\text{C}$ ,  $V_{CM} = V_{OUT} = V_S/2$ , and  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted. Boldface limits apply over the specified temperature range,  $T_A = -40\text{ }^\circ\text{C to }+125\text{ }^\circ\text{C}$ .


| Parameter                         | Symbol        | Conditions  | Min. | Typ.       | Max. | Unit               |
|-----------------------------------|---------------|---|------|------------|------|--------------------|
| <i>OUTPUT</i>                     |               |   |      |            |      |                    |
| High output voltage swing         | $V_{OH}$      | $V_S = \pm 20\text{ V}$ , $R_L = 10\text{ k}\Omega$ |      | $+V_S-95$  |      | mV                 |
|                                   |               | $V_S = \pm 20\text{ V}$ , $R_L = 2\text{ k}\Omega$  |      | $+V_S-260$ |      |                    |
| Low output voltage swing          | $V_{OL}$      | $V_S = \pm 20\text{ V}$ , $R_L = 10\text{ k}\Omega$ |      | $-V_S+55$  |      | mV                 |
|                                   |               | $V_S = \pm 20\text{ V}$ , $R_L = 2\text{ k}\Omega$  |      | $-V_S+240$ |      |                    |
| Short-circuit current             | $I_{SC}$      |   |      | $\pm 45$   |      | mA                 |
| <i>POWER SUPPLY</i>               |               |   |      |            |      |                    |
| Operating supply voltage          | $V_S$         | $T_A = -40\text{ to }+125\text{ }^\circ\text{C}$    | 4.5  |            | 48   | V                  |
| Quiescent current (per amplifier) | $I_Q$         | $V_S = 5\text{ V}$                                  |      | 4.2        |      | mA                 |
|                                   |               | $V_S = 40\text{ V}$                                 |      | 7.1        |      |                    |
| <i>THERMAL CHARACTERISTICS</i>    |               |   |      |            |      |                    |
| Operating temperature range       | $T_A$         |   | -40  |            | +125 | $^\circ\text{C}$   |
| Package Thermal Resistance        | $\theta_{JA}$ | SOT23-5L  |      | 190        |      | $^\circ\text{C/W}$ |
|                                   |               | MSOP-8L   |      | 201        |      |                    |
|                                   |               | SOIC-8L   |      | 125        |      |                    |
|                                   |               | TSSOP-14L   |      | 112        |      |                    |
|                                   |               | SOIC-14L  |      | 115        |      |                    |

### Typical Performance Characteristics


At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , and  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted.

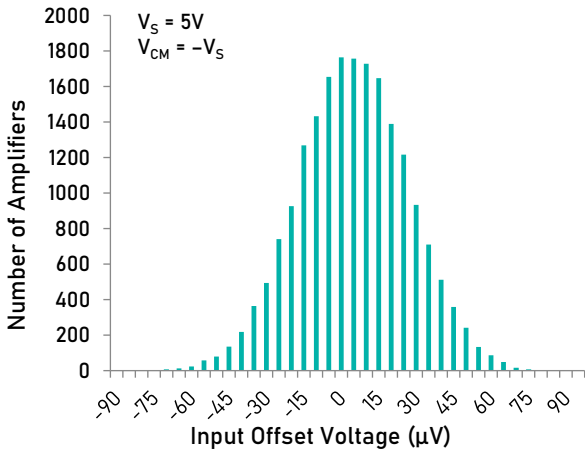


Offset Voltage Production Distribution

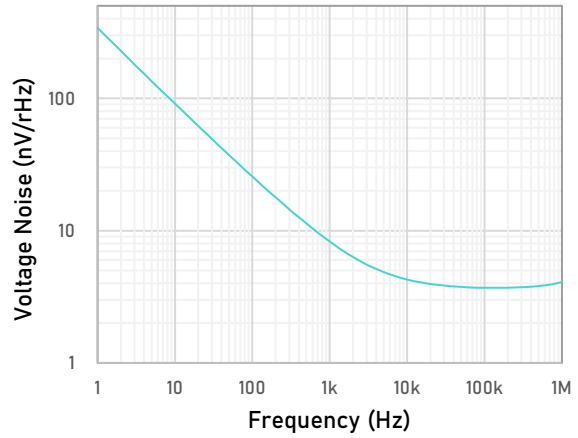


Input Voltage Noise Spectral Density as a function of Frequency

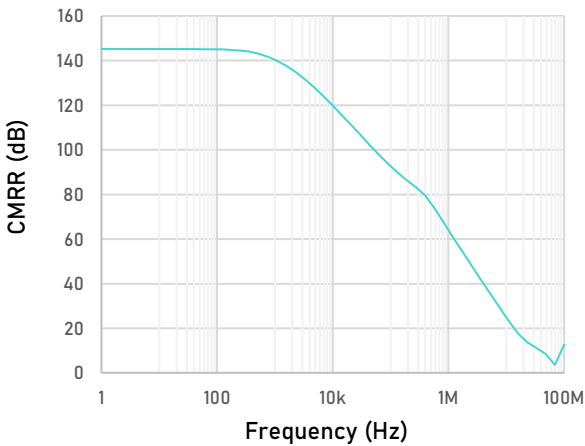


CMRR as a function of Frequency

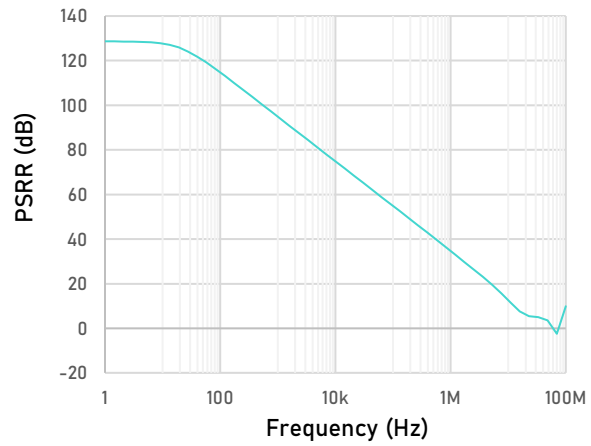

PSRR as a function of Frequency

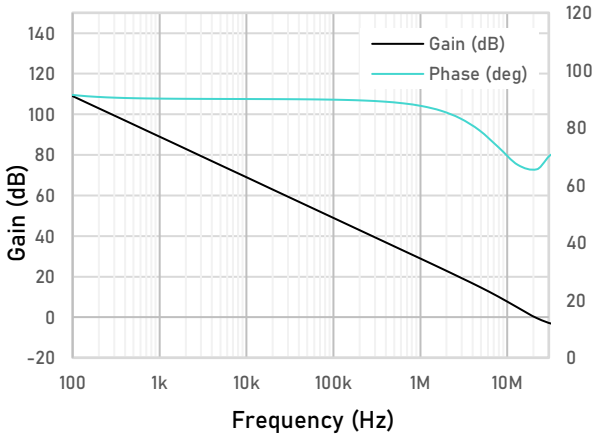

Open-loop Gain and Phase as a function of Frequency

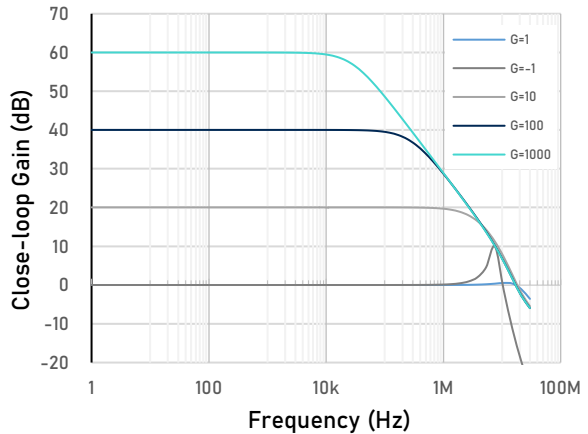


Close-loop Gain as a function of Frequency


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
Linearin and designs are registered trademarks of Linearin Technology Corporation.  
© Copyright Linearin Technology Corporation. All Rights Reserved.  
All other trademarks mentioned are the property of their respective owners.

### Typical Performance Characteristics (Continued)


At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , and  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted.

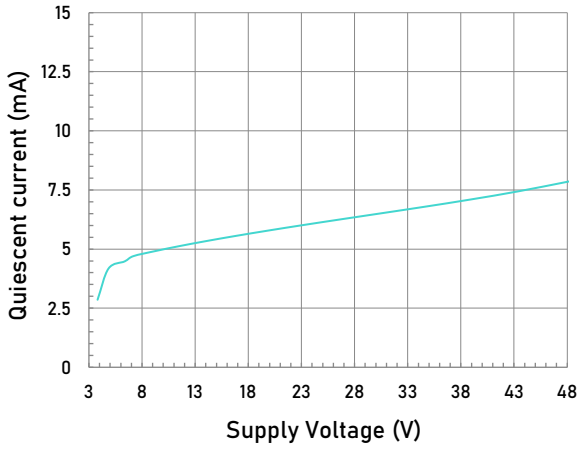


Quiescent Current as a function of Supply Voltage

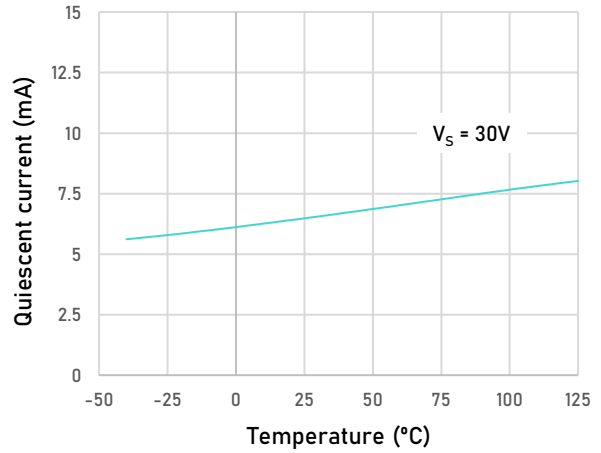


Quiescent Current as a function of Temperature

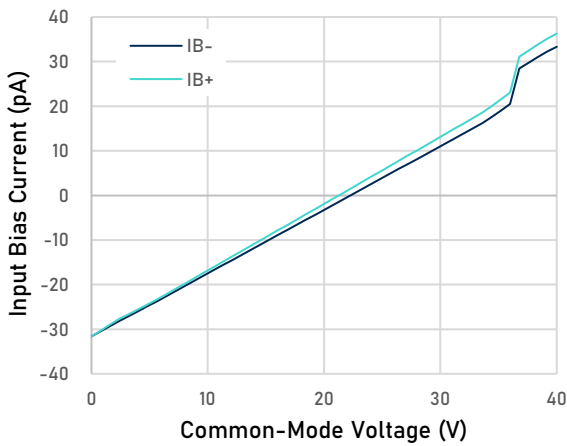


Bias Current as a function of Common-Mode Voltage

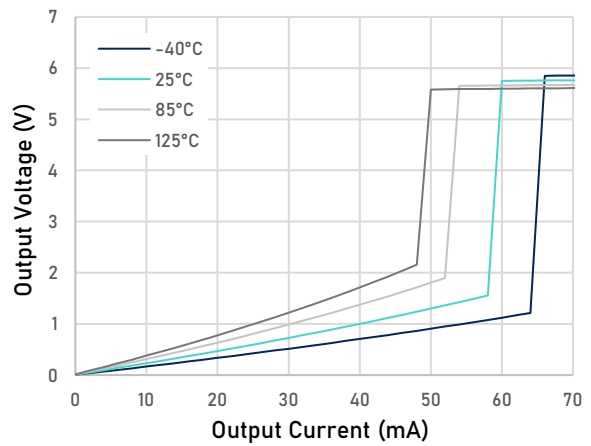

Output Voltage Swing as a function of Output Current (Sinking,  $V_S = 40\text{ V}$ )

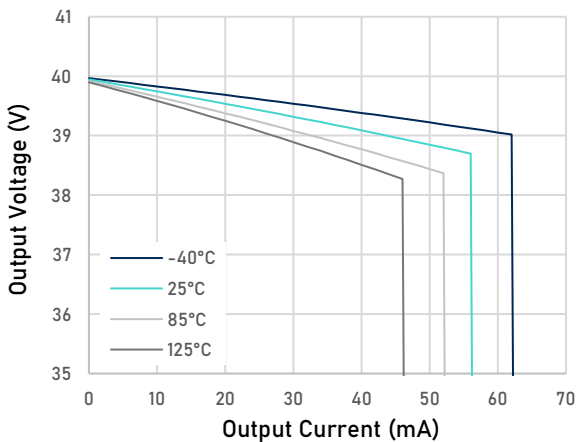

Output Voltage Swing as a function of Output Current (Sourcing,  $V_S = 40\text{ V}$ )

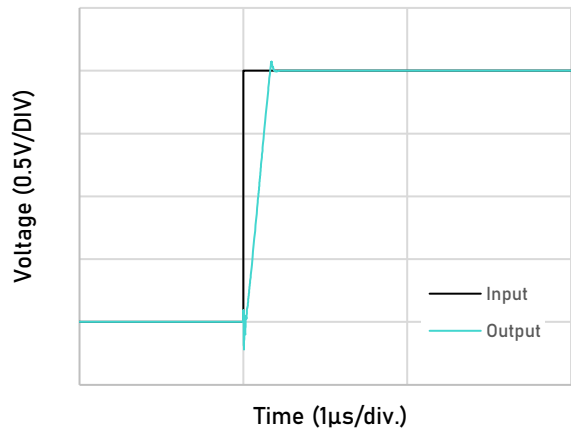


Large-Signal Step Response(Rising)


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

Typical Performance Characteristics (Continued)

At  $T_A = +25\text{ }^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , and  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted.

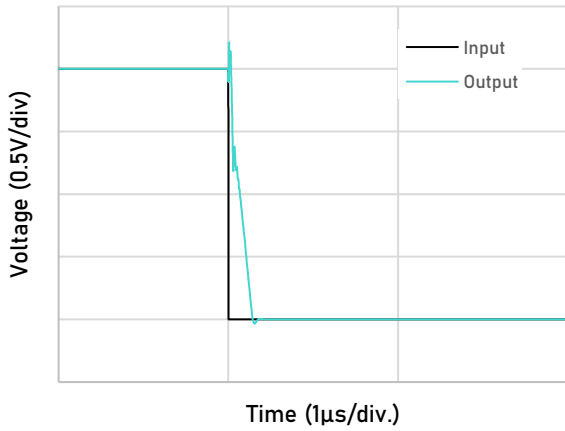


Large-Signal Step Response(Failing)

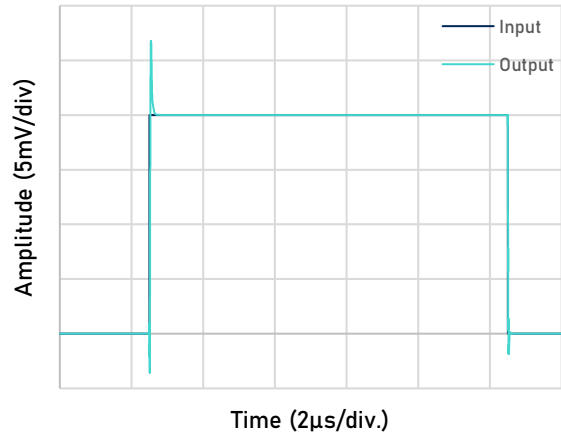


Small-Signal Step Response

## Tape and Reel Information

### REEL DIMENSIONS

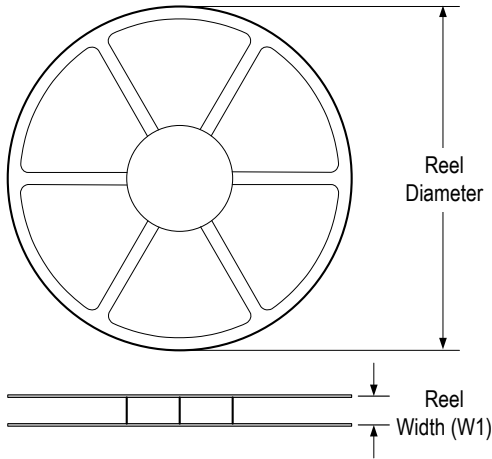


### TAPE DIMENSIONS

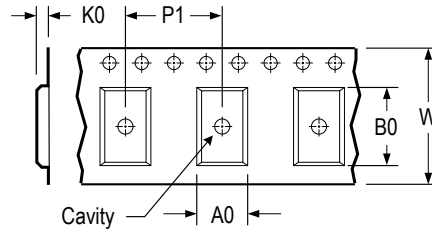

|    |   |
|----|---|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

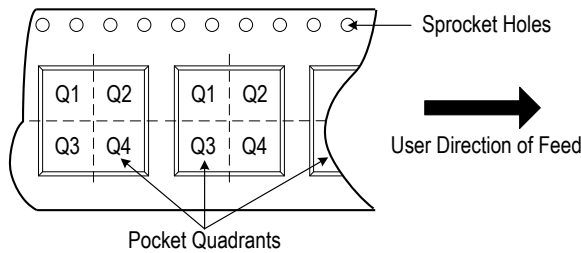


\* All dimensions are nominal

| Device        | Package Type | Pins | SPQ   | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin 1 Quadrant |
|---------------|--------------|------|-------|--------------------|--------------------|---------|---------|---------|---------|--------|----------------|
| LTA8091XT5/R6 | SOT23        | 5    | 3 000 | 178                | 9.0                | 3.3     | 3.2     | 1.5     | 4.0     | 8.0    | Q3             |




### Package Outlines

#### DIMENSIONS, SOT23-5L

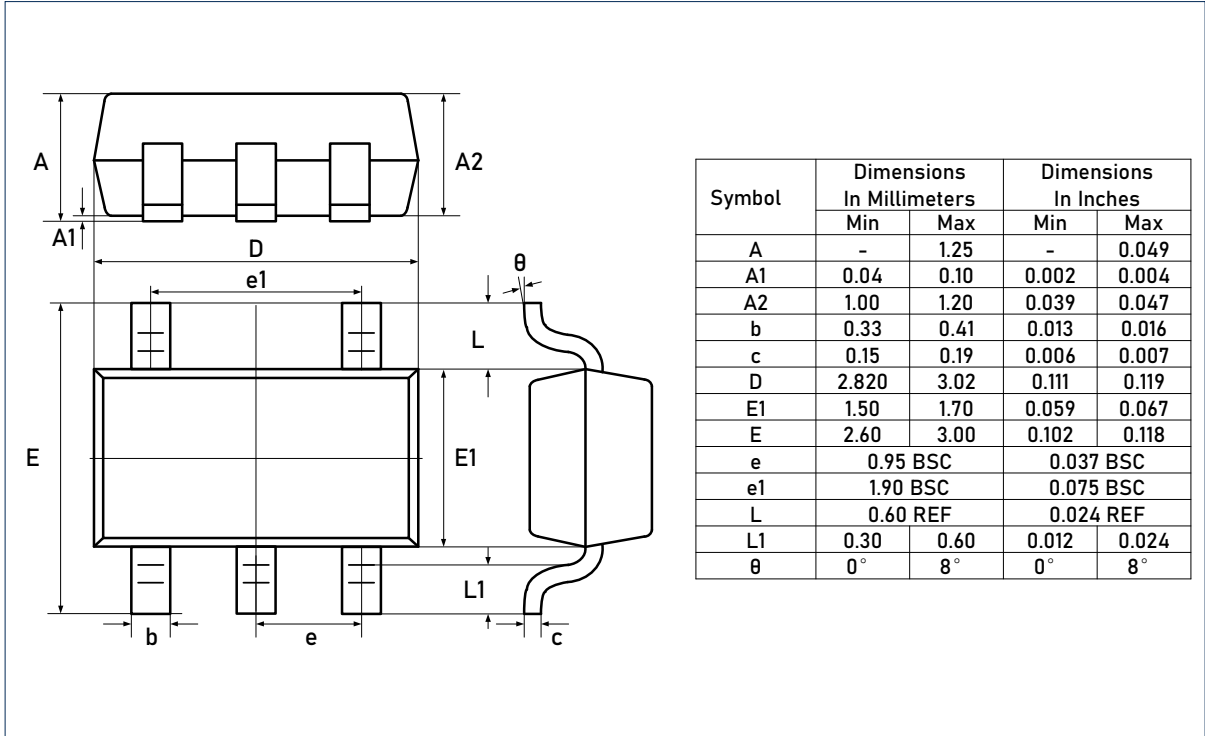


#### RECOMMENDED SOLDERING FOOTPRINT, SOT23-5L

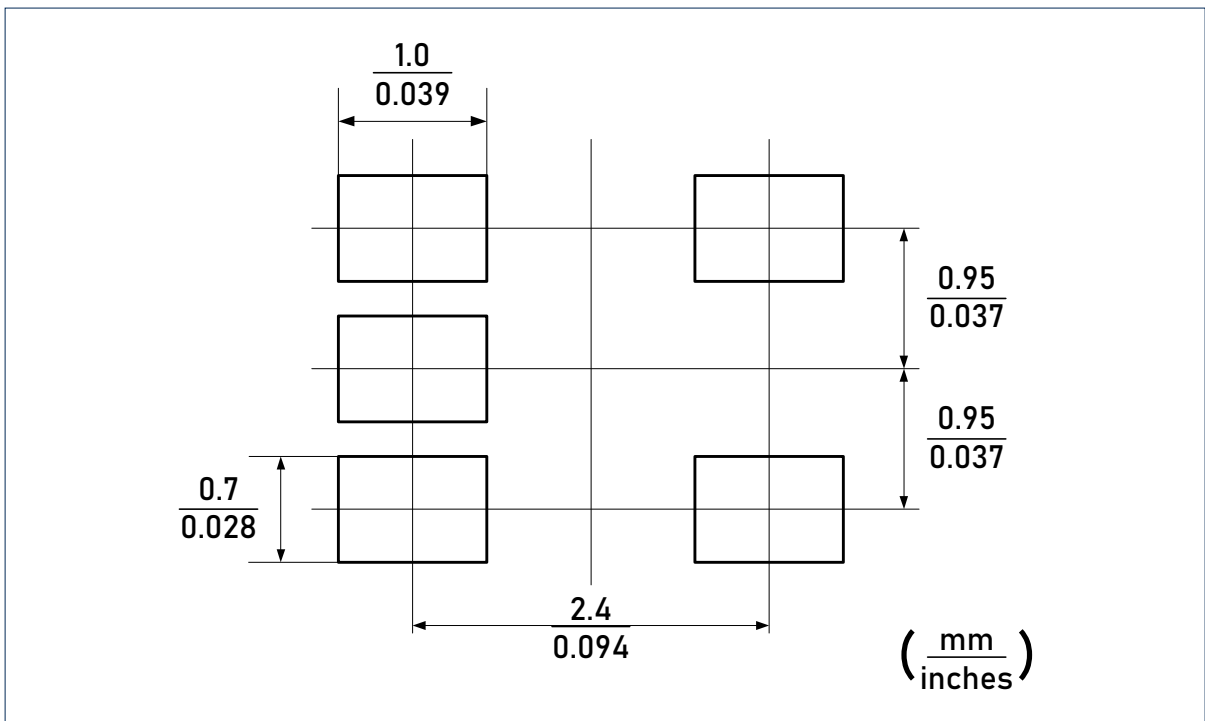


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, SOIC-8L

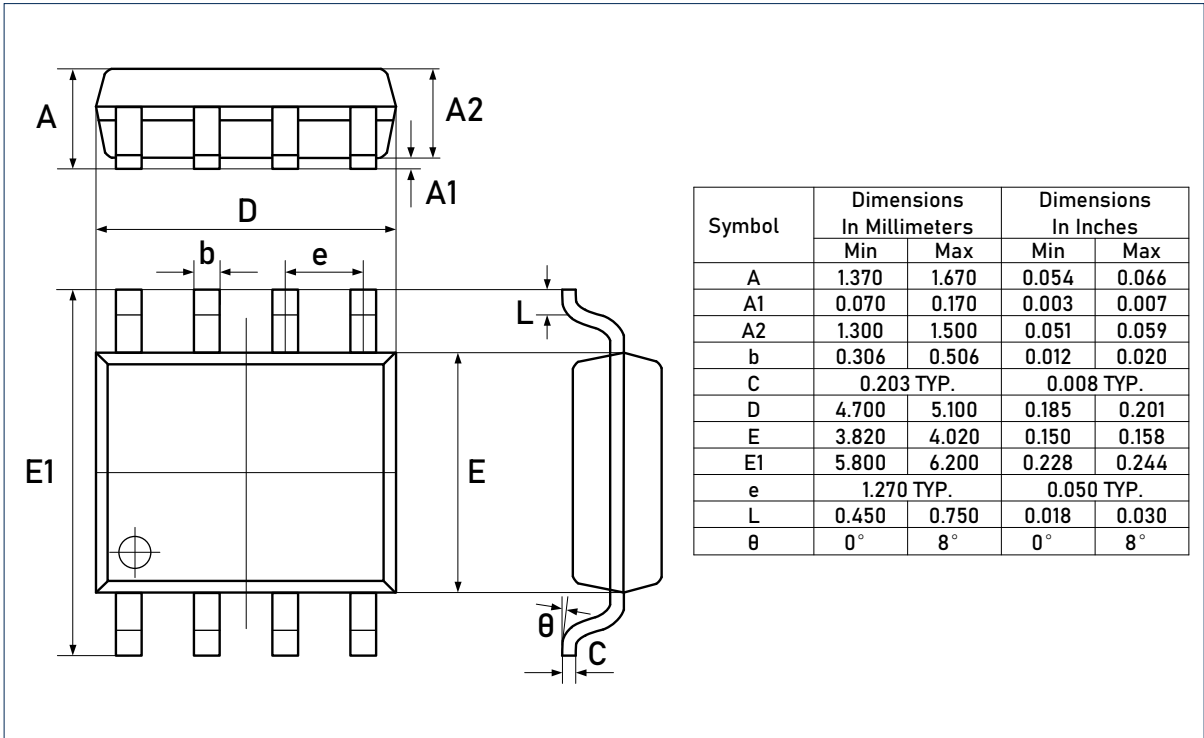


RECOMMENDED SOLDERING FOOTPRINT, SOIC-8L

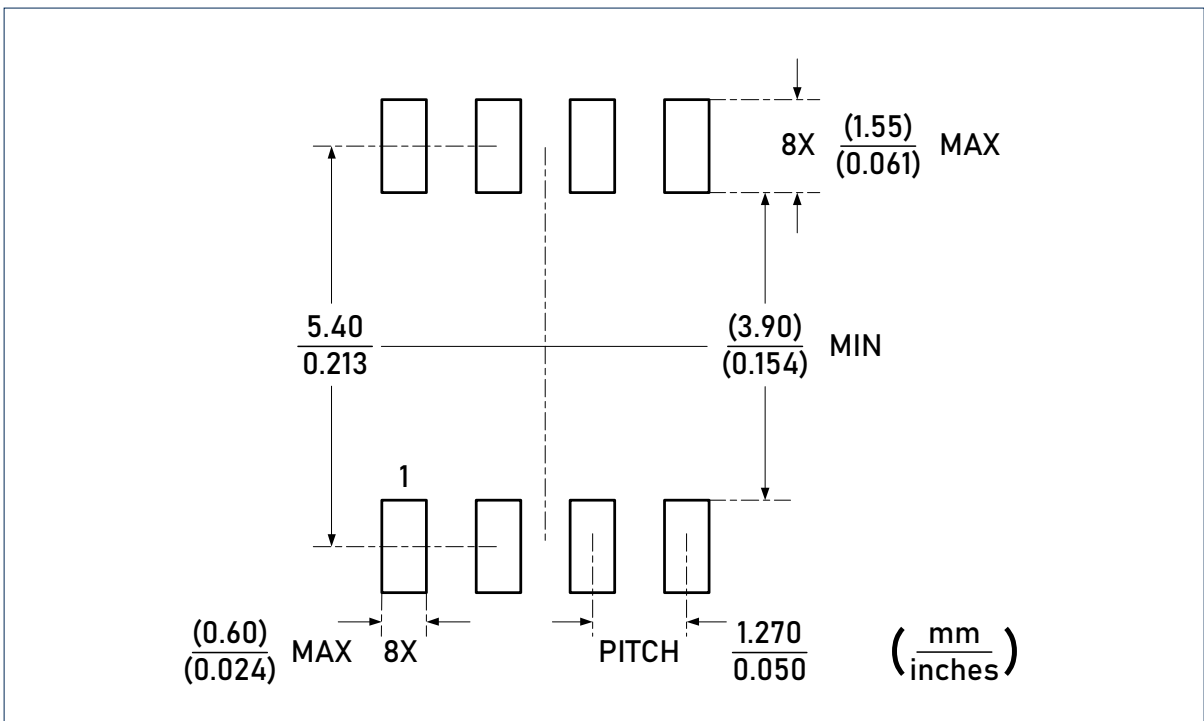


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, MSOP-8L

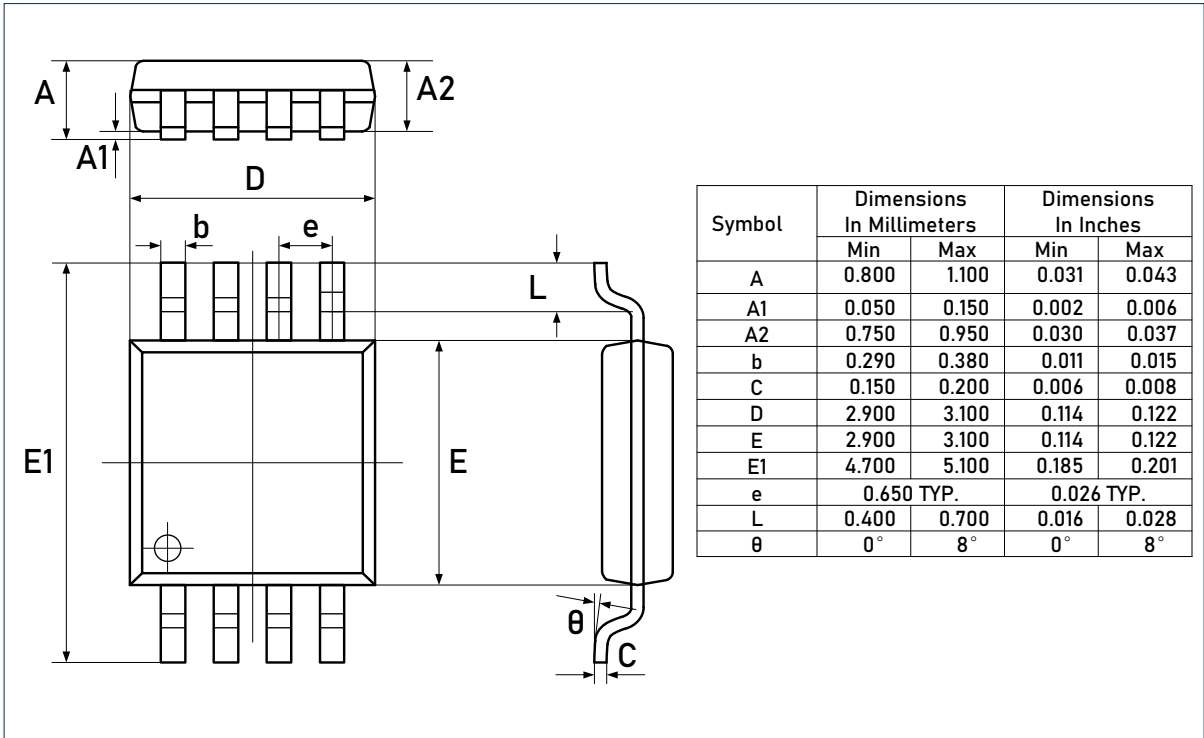


RECOMMENDED SOLDERING FOOTPRINT, MSOP-8L

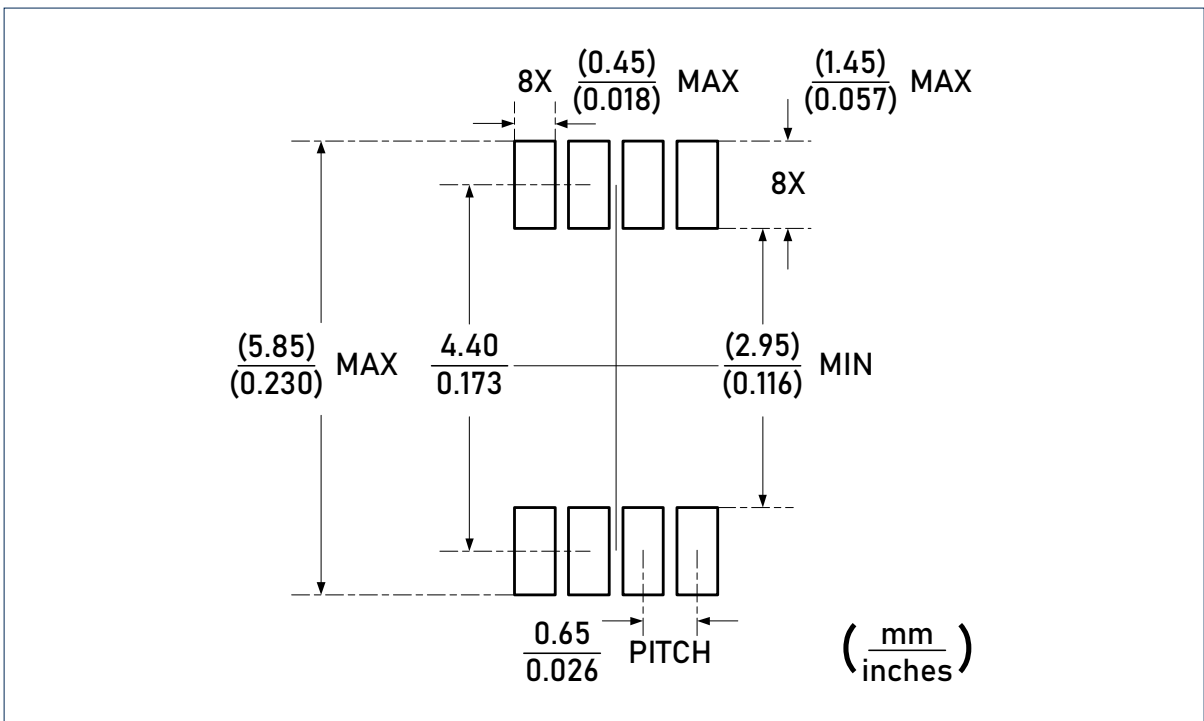

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.


## Package Outlines (continued)

## DIMENSIONS, DFN3x3-8L

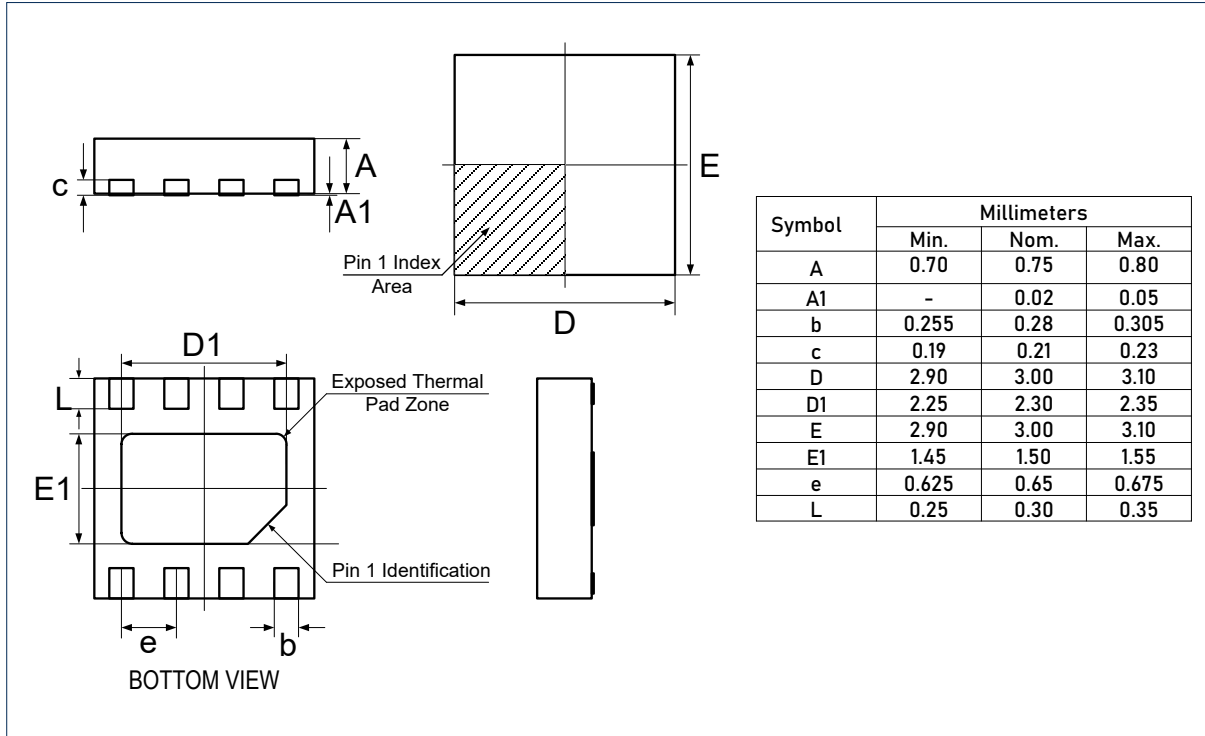


Package Outlines (continued)

DIMENSIONS, SOIC-14L

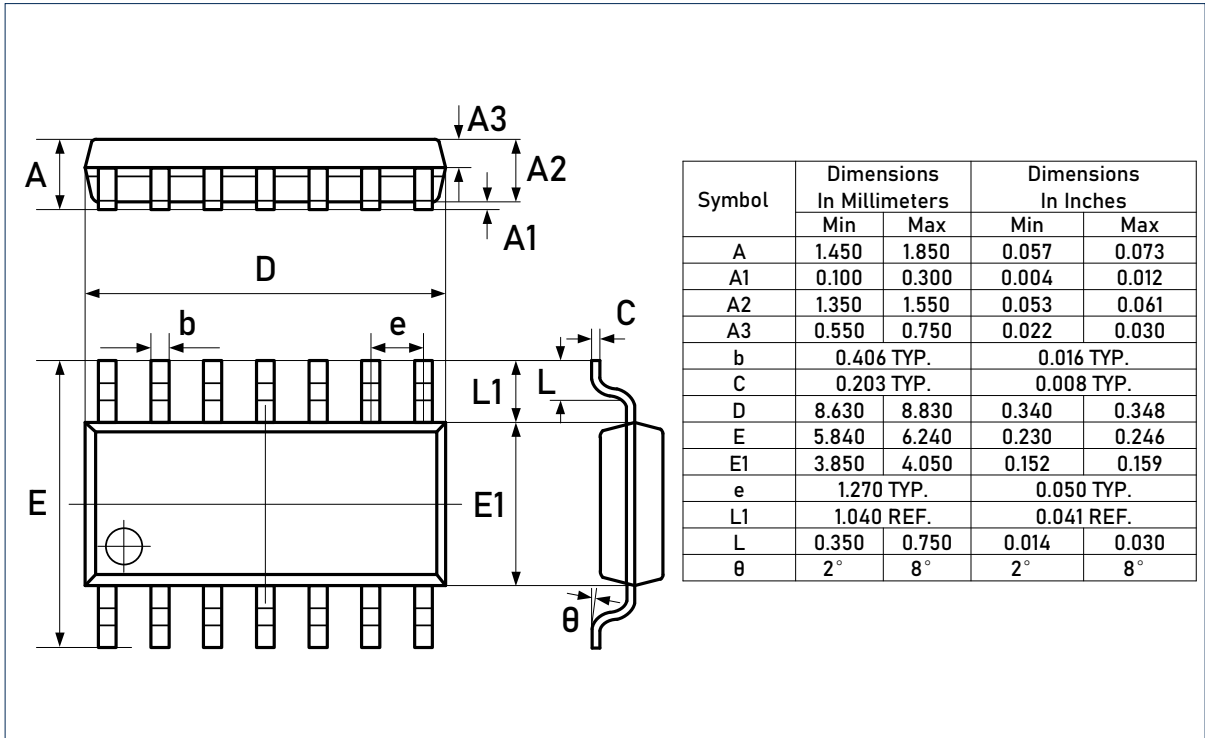


RECOMMENDED SOLDERING FOOTPRINT, SOIC-14L

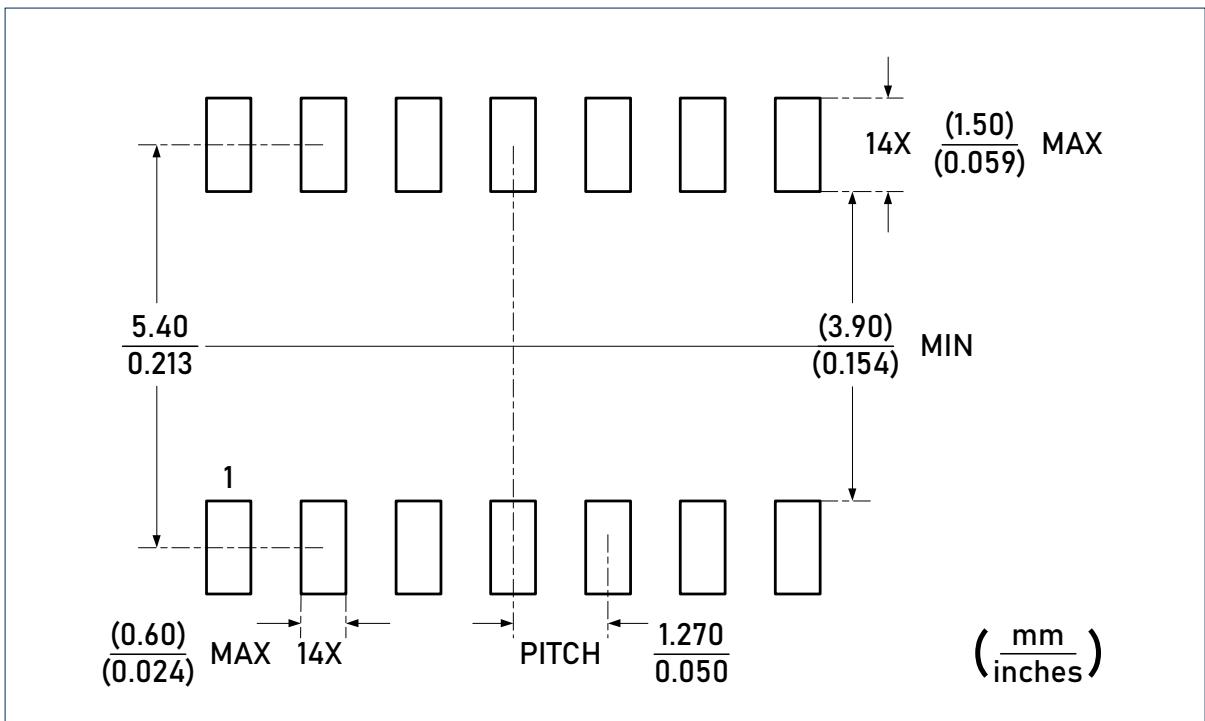


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, TSSOP-14L

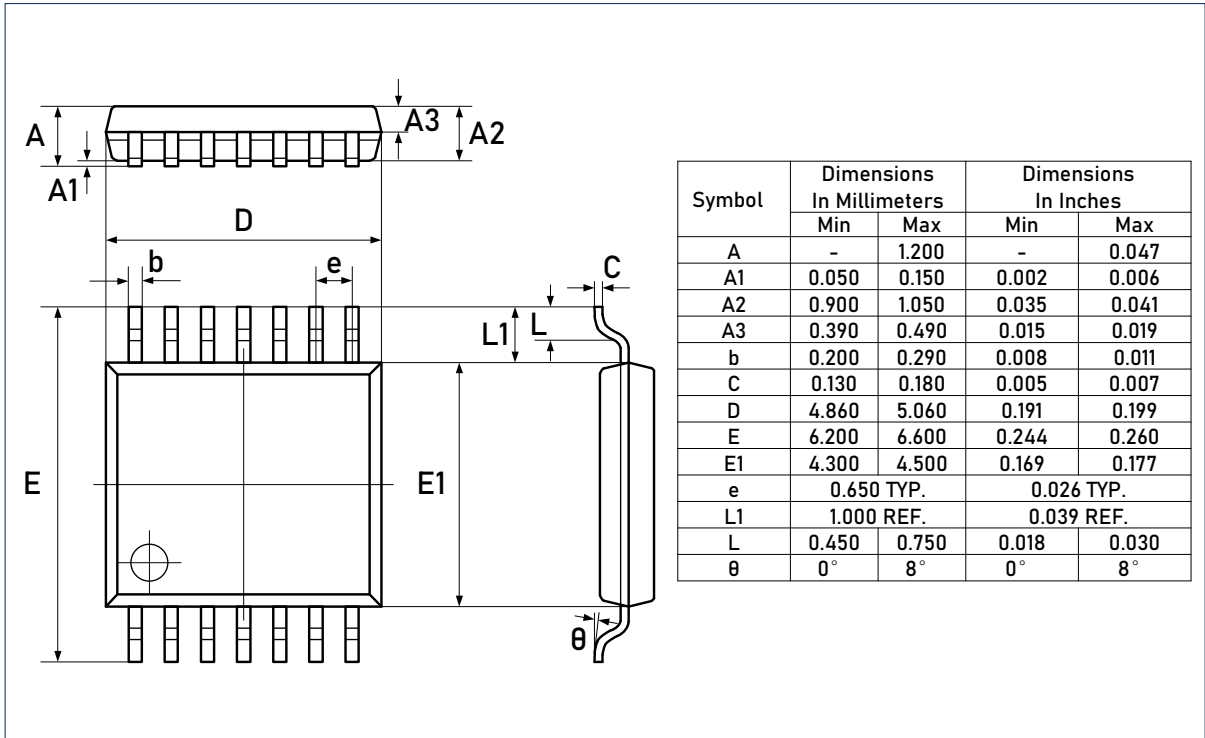

RECOMMENDED SOLDERING FOOTPRINT, SOIC-14L

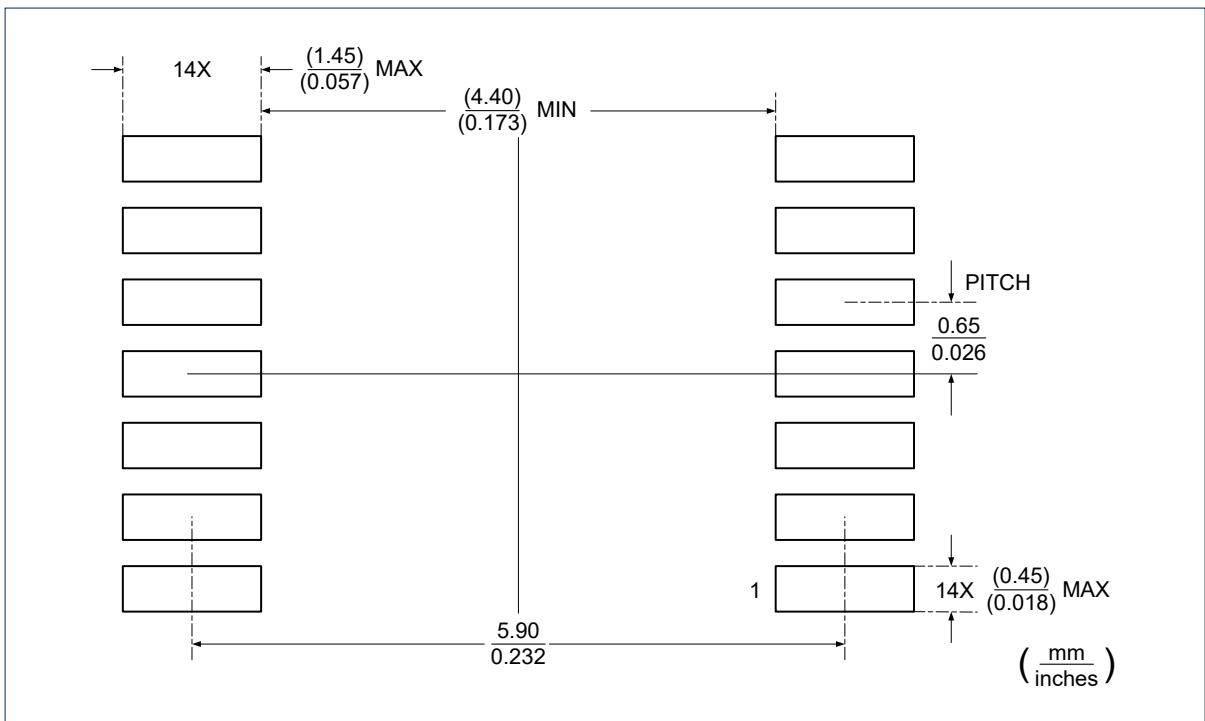

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

## Important Notice

---

Linearin is a global fabless semiconductor company specializing in advanced high-performance high-quality analog/mixed-signal IC products and sensor solutions. The company is devoted to the innovation of high performance, analog-intensive sensor front-end products and modular sensor solutions, applied in multi-market of medical & wearable devices, smart home, sensing of IoT, intelligent industrial & smart factory (industrie 4.0), and automotives. Linearin's product families include widely-used standard catalog products, solution-based application specific standard products (ASSPs) and sensor modules that help customers achieve faster time-to-market products. Go to <http://www.linearin.com> for a complete list of Linearin product families.

For additional product information, or full datasheet, please contact with the Linearin's Sales Department or Representatives.